

Laundry Press – Air operated

FPA4-WC




Features and benefits

- High temperature nickelplated polished head dries the fabric and gives it a flat finish
- Professional steam heating system for head (for external steam supply or with optional built-in boiler)
- Adjustable pressure regulator for pressing different fabrics achieves an excellent finish
- Air operated reduces operator fatigue and allows high production output
- Two button closing improves operator safety
- High quality padding and cover for buck reduces impressions
- Easy installation and operation due to no vacuum needed and therefore no pedal
- Buck size 1350 x 460 mm

Main options

- Integral steam boiler – 18 kW
- Integral air compressor
- Safety head guard (CE) improves operator safety
- Electric steam iron

Electrical connections	Standard	Optional			
		Built-in boiler	Built-in air comp.	Electric steam iron	
Voltage, standard 208-240V 1 AC 50/60 Hz	kW (A)	-	-	-	0.8 (6)
Voltage, built-in boiler 230V 3 AC 50/60 Hz	kW (A)	-	12 (35)	1.13	-
Steam, air and vacuum connection					
Steam	DN	15	-	15	15
Rec. steam pressure	kPa	700	-	700	700
Steam consumption	kg/h	20	-	20	20
Condensate	DN	15	-	15	15
Compressed air	DN	10	10	-	10
Rec. air pressure	kPa	700	700	-	700
Air consumption	l/min	29 l/cycle			
Shipping data					
	net, kg	400	+ 46	+ 46	+ 6
	crated, kg	430	+ 46	+ 46	+ 6
Dimensions in mm					
A Width		1250	1250	1250	1250
B Depth		1135	1135	1135	1135
C Height		1270	1270	1270	1270
D		1600	1600	1600	1600
E		800	800	800	800
F		1030	1030	1030	1030
G		1390	1390	1390	1390
H		500	500	500	500
1 Control panel	4 Condensate	7 Boiler drain (built-in boiler)			
2 Electrical connection	5 Compressed air				
3 Steam connection	6 Water supply (built-in boiler)				

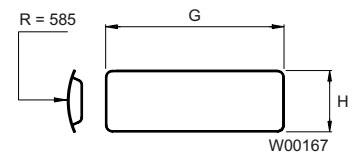

Rectangular shape

